



SOT

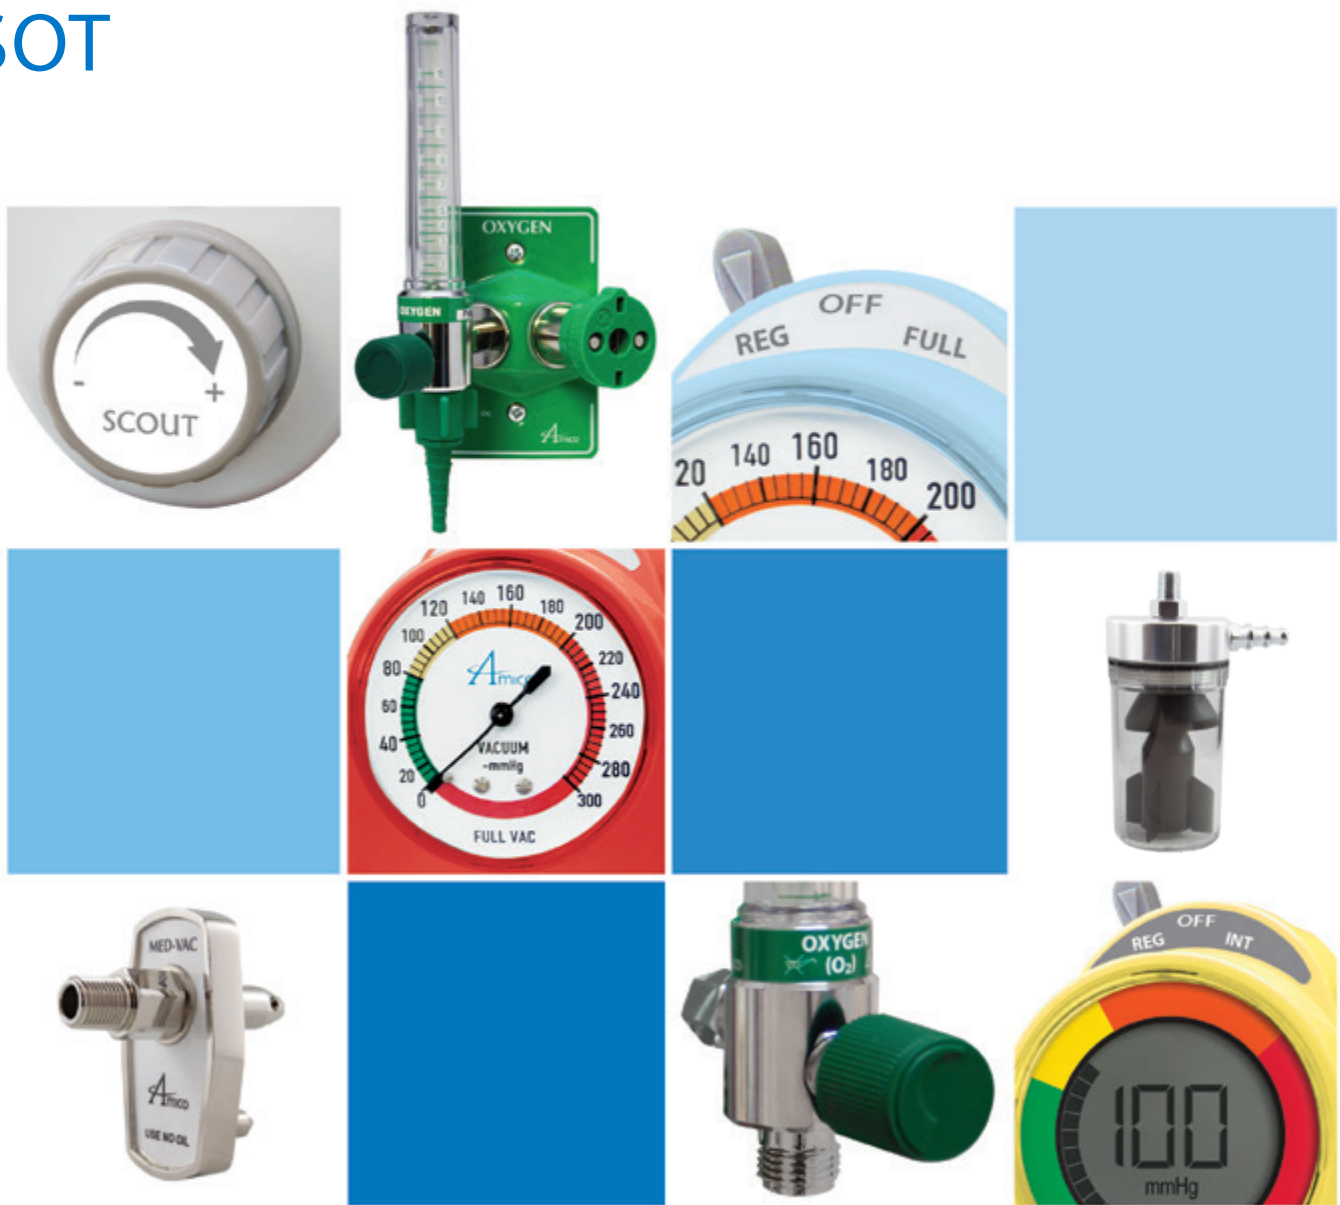

Suction and Oxygen Therapy

Vacuum Regulator

12YEAR
warranty

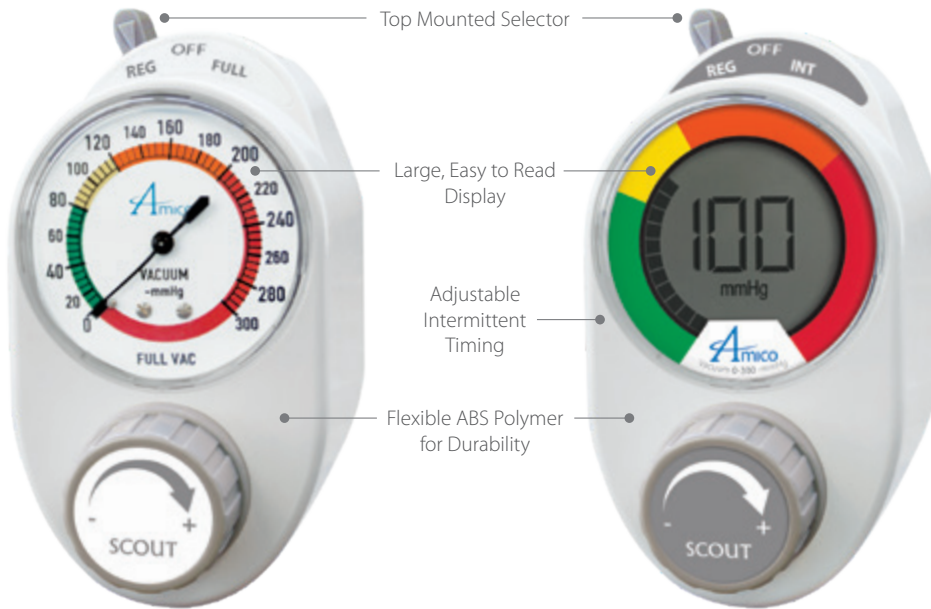

Analog

Digital

Features:

- Smallest and lightest unit on the market: 10 oz (290 g)
- ABS polymer casing – impact resistant and durable
- User-adjustable Timing can be accessed from the back of the unit
- Easy to read, color-coded gauges
- 10 Year warranty (Analog)
- 12 Year warranty (Digital)
- Only unit on the market with a disposable, see-through back body
- Designed with Infection Control features
- Ability to reverse flush
- Disposable component for easy cleaning

Color Coding Options



➡ Ease of Inventory Management

- By Department:
 - ED
 - Pediatrics
 - ICU

➡ Ease of Model Identification

- By Model:
 - Surgical/Continuous High
 - Pediatrics
 - Continuous/Intermittent
 - Neonatal

Identify Contamination Instantly

Did You Know?

PATENT PENDING

NEW Clear Back Plate

New
Infection
Control
Measure



Remove from the outlet
and identify contamination
immediately

In a study conducted in July 2010, entitled **Suction Regulators: A Potential Vector for Hospital-Acquired Pathogens**, the following results were determined:

- **37% of regulators** found in a hospital are **contaminated**
- These contaminants include "growth of well-established nosocomial pathogens" **known to cause Hospital Acquired Infections (HAI)**
- Contaminants **spread from a regulator to the wall-side canister and back to a simulated patient stomach within 24 hours**
- There is no mandatory check or preventative maintenance schedule outlined to determine if contamination is present


Amico's replaceable back body allows users to **safely dispose of the contaminated portion** of the regulator and **replace it with new**, sterile components for a fraction of the cost.

Suction Regulators: A Potential Vector for Hospital Acquired Pathogens by Keith S. Kaye, MD, MPH; Dror Marchaim, MD; Chester Smialowicz, MD; Lauren Bentley, MSBME

With **Amico's Clear Back Plate** and disposable body, you can spot contamination and have a new regulator in 3 simple steps:

Contaminated?

Disposable Body

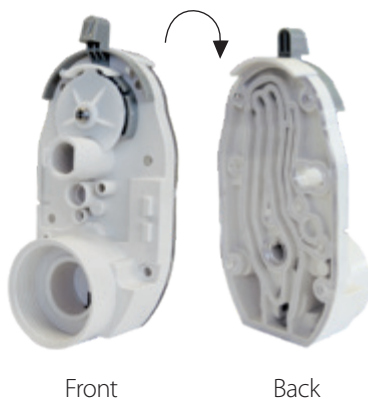

Step 1:



Step 2:



Step 3: Reassemble with only 1 NEW Component



Continuous Models - White Labels

Continuous 3 Mode



SRA-C3U2-F2

Continuous 2 Mode



SRA-C2U2-F2

Pediatric 2 Mode



SRA-P2U2-F2

Neonatal 2 Mode



SRA-N2U2-F2

Continuous High/Surgical



SRA-CHU2-F2

Amico's continuous regulators provide unique features to ensure correct suctioning procedures and help improve clinical practice.

- Adult models regulate to 300 mmHg and at full suction provide maximum pressure from wall outlets.
- Continuous High/Surgical models regulate to 750 mmHg and are uniquely designed for surgical procedures. They provide high flow rates for an OR environment.
- Pediatric and Neonatal continuous models regulate to 160 mmHg and 100 mmHg with positive pressure relief valves for safety.
- All units can be upgraded to Intermittent suctioning as well as Digital displays.

Continuous/Intermittent Models - Grey Labels

Adult Continuous/Intermittent



SRA-CIU2-F2

Pediatric Continuous/Intermittent



SRA-PIU2-F2

Neonatal Continuous/Intermittent



SRA-NIU2-F2

Amico's continuous/intermittent models are ideal for any critical care environment but can also be used in all patient areas since they are considered combination units. Our unique intermittent module provides a reliable and quiet means of cycling the suction levels on and off during intermittent mode.

- Adult models regulate to 300 mmHg, Pediatric models to 160 mmHg and Neonatal models to 100 mmHg.
- Pediatric and Neonatal models have positive pressure relief valves for safety.
- ON/OFF Timing cycles operate independently and can be adjusted on the back plate of the unit without removing any casing.
- All units can be upgraded to Digital displays.

Vacuum Regulator with Roll Stand



part#: S-RS-30-DISS-S*

*Canisters, holders, tubing and suction regulator sold separately

Features:

- Overall height 30" (76.2 cm)
- (5) 2" (5.08 cm) swivel casters
- Stainless steel body
- Top handle for easy mobility
- Side hook for excess tubing or hoses
- 2 mounting locations for suction canister placement
- Regulator mount (VAC DISS Male) – available for single or dual regulators

Accessories:



Vacuum/Safety Traps



Disposable Canister and Holder



Autoclavable Canisters and Holders

Easy to Upgrade:

Analog to Digital




Technical Specifications

Performance				
Flowrate	Intermittent:	Adult: 8 LPM	Pediatric: 8 LPM	Neonatal: 8 LPM
	Continuous:	Adult: 65 LPM	Pediatric: 40 LPM	Neonatal: 40 LPM
Timing	• 16 seconds on/8 seconds off • Timing can be adjusted on the back of the unit with access to ON and OFF needle valves • Starts in the OFF position			
		Gauge Accuracy		
	Vacuum Range	Analog	Digital	
Neonatal	0-100 mmHg (13 kPa)	± 3% Full-scale	± 1% Full-scale	
Pediatric	0-160 mmHg (20 kPa)	± 3% Full-scale	± 1% Full-scale	
Adult	0-300 mmHg (40 kPa)	± 3% Full-scale	± 1% Full-scale	
Surgical	0-750 mmHg (94 kPa)	± 3% Full-scale	± 1% Full-scale	
Physical				
Dimensions	5.94" H x 2.93" W x 4.04" D (15.09 cm x 7.44 cm x 10.26 cm)			
Weight	Continuous: 10 oz (290 g), Intermittent: 13 oz (360 g)			
Battery				
Lithium	Two 2⁄3 AA batteries, 3.6 V, 1.6 Ah, lithium			


Model Number

SRX-XXXX-XX(X)*

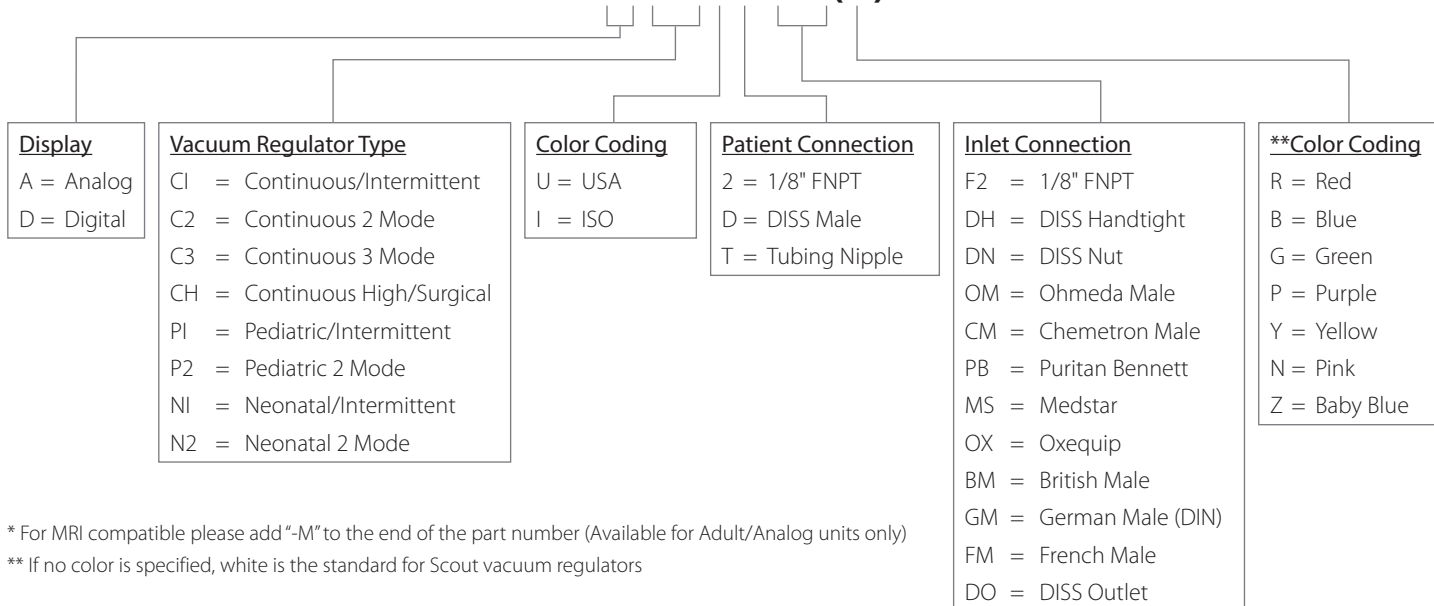

Flowmeters

5YEAR
warranty

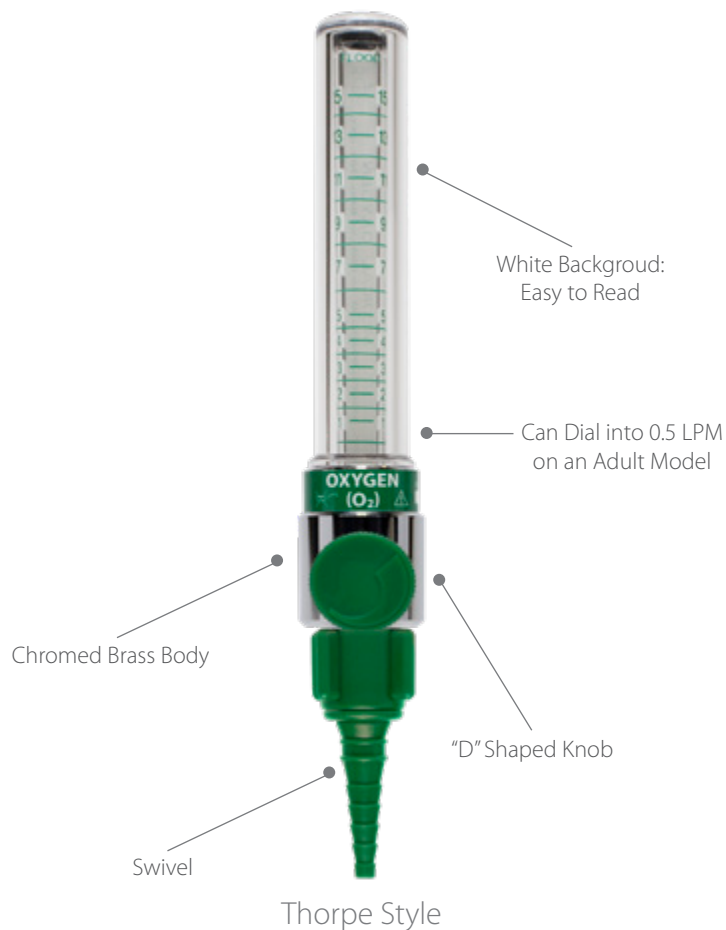

Features:

- Complete line of Flowmeters from Neonatal to Adult
- Available in standard Thorpe Style and Dial Style
- Standard 1/8" FNPT connection, but also customizable with different adapters and accessories
- MRI options are available
- Available in USA and ISO colors
- Smallest and lightest chromed, brass bodied Flowmeter in the industry
- Color coded inner tube and labeling
- Easy to service
- No strip "D" shape knob
- Includes an inlet filter and inlet extension



Dual/Y-block Flowmeter Assembly



Non-Removable
Flowmeter

Dual Outlet with Flowmeter

Accessories:



Reusable Humidifier



Disposable Humidifier



Swivels/Christmas Trees



Power Takeoff

Dial Style



Oxygen Dial Flowmeter



Medical Air Dial Flowmeter

Features:

- Available in Oxygen in 25, 15, 8 and 4 LPM
- Available in Medical Air in 25 and 15 LPM
- Smallest and lightest in the industry
- Smallest increment is 1/32
- Gas specific color-coded labeling
- Encased in an anodized aluminum housing
- Easy to read window


Thorpe Style Technical Specifications

Physical				
Dimensions	5.6" H x 2.7" W (14.22 cm x 6.86 cm)			
Weight	6 oz (170 g)			
Flow Range	Oxygen:	0 - 70 LPM	Medical Air:	0 - 70 LPM
		0 - 15 LPM		0 - 15 LPM
		0 - 8 LPM		
		0 - 3.5 LPM		
		0 - 1 LPM		
		0 - 200 CC		
• Back pressure compensated so flow accuracy is not affected by restrictions • Calibrated at 50 psi • Serialized for ease of identification				

Dial Style Technical Specifications

Flow Range	Oxygen:	0 - 25 LPM	0, 1, 2, 3, 4, 6, 8, 10, 12, 15, 20, 25
		0 - 15 LPM	0.5, 1, 1.5, 2, 3, 4, 5, 6, 8, 10, 15
		0 - 8 LPM	0.5, 1, 1.5, 2, 2.5, 3, 4, 5, 6, 7, 8
		0 - 4 LPM	0, 0.03, 0.06, 0.12, 0.25, 0.5, 0.75, 1, 1.5, 2, 3, 4
	Medical Air:	0 - 15 LPM	0.5, 1, 1.5, 2, 3, 4, 5, 6, 8, 10, 15
		0 - 25 LPM	0.5, 1, 2, 4, 6, 8, 10, 12, 15, 20, 25
• Calibrated at 50 psi			
• Serialized for ease of identification			

Model Number FMX-XXY-XX(YY)*

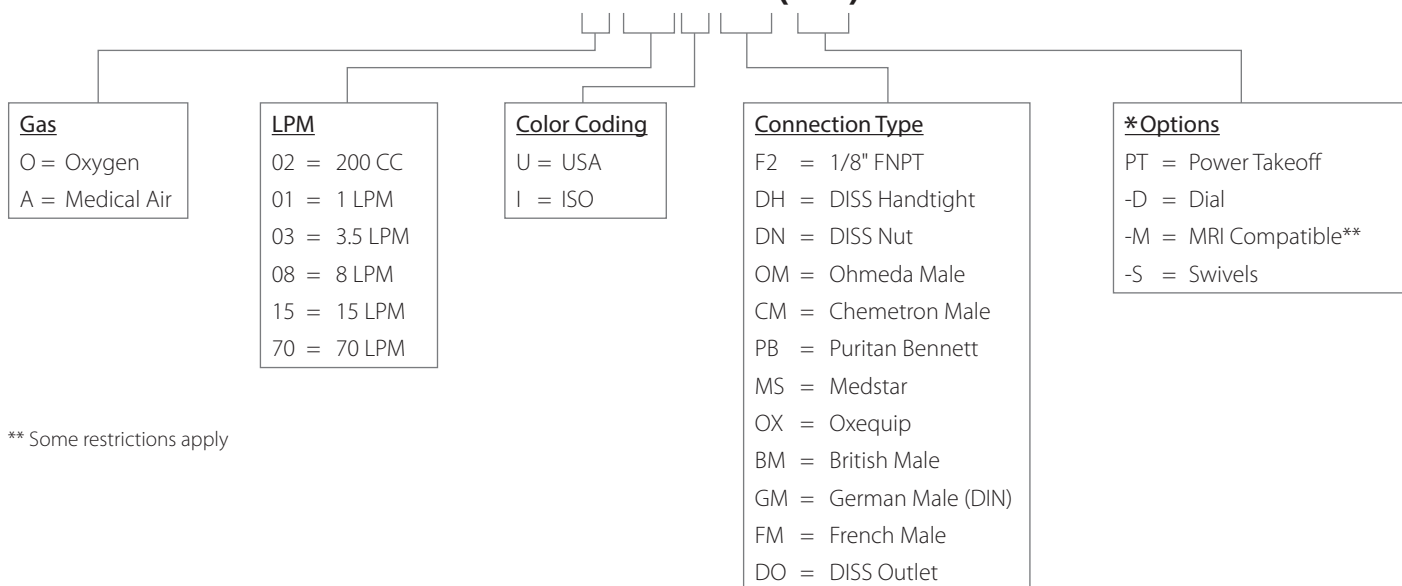

** Some restrictions apply

OHMEDA Adapters

	 OXYGEN	 MEDICAL AIR	 VACUUM	 N ₂ O	 WAGD	 CO ₂
 1/8" NPT Male	S-AD-OHUO-M2	S-AD-OHUA-M2	S-AD-OHUV-M2	S-AD-OHU2-M2	S-AD-OHUW-M2	S-AD-OHUC-M2
 1/4" Hose Barb 5/16" Hose Barb	S-AD-OHUO-HB4	S-AD-OHUA-HB4	S-AD-OHUV-HB4 S-AD-OHUV-HB5	S-AD-OHU2-HB4	S-AD-OHUW-HB4 S-AD-OHUW-HB5	S-AD-OHUC-HB4
 DISS Male	S-AD-OHUO-DM	S-AD-OHUA-DM	S-AD-OHUV-DM	S-AD-OHU2-DM	S-AD-OHUW-DM	S-AD-OHUC-DM
 1/4" NPT Male	S-AD-OHUO-M4	S-AD-OHUA-M4	S-AD-OHUV-M4	S-AD-OHU2-M4	S-AD-OHUW-M4	S-AD-OHUC-M4
 1/8" NPT Female	S-AD-OHUO-F2	S-AD-OHUA-F2	S-AD-OHUV-F2	S-AD-OHU2-F2	S-AD-OHUW-F2	S-AD-OHUC-F2
 DISS Handtight	S-AD-OHUO-DH	S-AD-OHUA-DH	S-AD-OHUV-DH	S-AD-OHU2-DH	S-AD-OHUW-DH	S-AD-OHUC-DH
 DISS Nut & Nipple	S-AD-OHUO-DN	S-AD-OHUA-DN	S-AD-OHUV-DN	S-AD-OHU2-DN	S-AD-OHUW-DN	S-AD-OHUC-DN

Replace the "U" with "I" for ISO colors - Oxygen, Medical Air and Vacuum only

OHMEDA Couplers

	 OXYGEN	 MEDICAL AIR	 VACUUM	 N ₂ O	 WAGD	 CO ₂
 1/8" NPT Male	S-CO-OHUO-M2	S-CO-OHUA-M2	S-CO-OHUV-M2	S-CO-OHU2-M2	S-CO-OHUW-M2	S-CO-OHUG-M2
 1/4" Hose Barb 5/16" Hose Barb	S-CO-OHUO-HB4	S-CO-OHUA-HB4	S-CO-OHUV-HB4 S-CO-OHUV-HB5	S-CO-OHU2-HB4	S-CO-OHUW-HB4 S-CO-OHUW-HB5	S-CO-OHUG-HB4
 DISS Male	S-CO-OHUO-DM	S-CO-OHUA-DM	S-CO-OHUV-DM	S-CO-OHU2-DM	S-CO-OHUW-DM	S-CO-OHUG-DM
 1/4" NPT Male	S-CO-OHUO-M4	S-CO-OHUA-M4	S-CO-OHUV-M4	S-CO-OHU2-M4	S-CO-OHUW-M4	S-CO-OHUG-M4
 1/8" NPT Female	S-CO-OHUO-F2	S-CO-OHUA-F2	S-CO-OHUV-F2	S-CO-OHU2-F2	S-CO-OHUW-F2	S-CO-OHUG-F2
 DISS Handtight	S-CO-OHUO-DH	S-CO-OHUA-DH	S-CO-OHUV-DH	S-CO-OHU2-DH	S-CO-OHUW-DH	S-CO-OHUG-DH
 DISS Nut & Nipple	S-CO-OHUO-DN	S-CO-OHUA-DN	S-CO-OHUV-DN	S-CO-OHU2-DN	S-CO-OHUW-DN	S-CO-OHUG-DN

Replace the "U" with "I" for ISO colors - Oxygen, Medical Air and Vacuum only

CHEMETRON Adapters

	 OXYGEN	 MEDICAL AIR	 VACUUM	 N ₂ O	 WAGD	 CO ₂
 1/8" NPT Male	S-AD-CHUO-M2	S-AD-CHUA-M2	S-AD-CHUV-M2	S-AD-CHU2-M2	S-AD-CHUW-M2	S-AD-CHUC-M2
 1/4" Hose Barb 5/16" Hose Barb	S-AD-CHUO-HB4	S-AD-CHUA-HB4	S-AD-CHUV-HB4 S-AD-CHUV-HB5	S-AD-CHU2-HB4	S-AD-CHUW-HB4 S-AD-CHUW-HB5	S-AD-CHUC-HB4
 DISS Male	S-AD-CHUO-DM	S-AD-CHUA-DM	S-AD-CHUV-DM	S-AD-CHU2-DM	S-AD-CHUW-DM	S-AD-CHUC-DM
 1/4" NPT Male	S-AD-CHUO-M4	S-AD-CHUA-M4	S-AD-CHUV-M4	S-AD-CHU2-M4	S-AD-CHUW-M4	S-AD-CHUC-M4
 1/8" NPT Female	S-AD-CHUO-F2	S-AD-CHUA-F2	S-AD-CHUV-F2	S-AD-CHU2-F2	S-AD-CHUW-F2	S-AD-CHUC-F2
 DISS Handtight	S-AD-CHUO-DH	S-AD-CHUA-DH	S-AD-CHUV-DH	S-AD-CHU2-DH	S-AD-CHUW-DH	S-AD-CHUC-DH
 DISS Nut & Nipple	S-AD-CHUO-DN	S-AD-CHUA-DN	S-AD-CHUV-DN	S-AD-CHU2-DN	S-AD-CHUW-DN	S-AD-CHUC-DN

Replace the "U" with "I" for ISO colors - Oxygen, Medical Air and Vacuum only

CHEMETRON Couplers

	 OXYGEN	 MEDICAL AIR	 VACUUM	 N ₂ O	 WAGD	 CO ₂
 1/8" NPT Male	S-CO-CHUO-M2	S-CO-CHUA-M2	S-CO-CHUV-M2	S-CO-CHU2-M2	S-CO-CHUW-M2	S-CO-CHUG-M2
 1/4" Hose Barb 5/16" Hose Barb	S-CO-CHUO-HB4	S-CO-CHUA-HB4	S-CO-CHUV-HB4 S-CO-CHUV-HB5	S-CO-CHU2-HB4	S-CO-CHUW-HB4 S-CO-CHUW-HB5	S-CO-CHUG-HB4
 DISS Male	S-CO-CHUO-DM	S-CO-CHUA-DM	S-CO-CHUV-DM	S-CO-CHU2-DM	S-CO-CHUW-DM	S-CO-CHUG-DM
 1/4" NPT Male	S-CO-CHUO-M4	S-CO-CHUA-M4	S-CO-CHUV-M4	S-CO-CHU2-M4	S-CO-CHUW-M4	S-CO-CHUG-M4
 1/8" NPT Female	S-CO-CHUO-F2	S-CO-CHUA-F2	S-CO-CHUV-F2	S-CO-CHU2-F2	S-CO-CHUW-F2	S-CO-CHUG-F2
 DISS Handtight	S-CO-CHUO-DH	S-CO-CHUA-DH	S-CO-CHUV-DH	S-CO-CHU2-DH	S-CO-CHUW-DH	S-CO-CHUG-DH
 DISS Nut & Nipple	S-CO-CHUO-DN	S-CO-CHUA-DN	S-CO-CHUV-DN	S-CO-CHU2-DN	S-CO-CHUW-DN	S-CO-CHUG-DN

Replace the "U" with "I" for ISO colors - Oxygen, Medical Air and Vacuum only

Adapters and Couplers

Puritan Bennett Adapters and Couplers

	OXYGEN	MEDICAL AIR	VACUUM	N ₂ O	WAGD
 1/8" NPT MALE	S-AD-PBUO-M2 S-CO-PBUO-M2	S-AD-PBUA-M2 S-CO-PBUA-M2	S-AD-PBUV-M2 S-CO-PBUV-M2	S-AD-PBU2-M2 S-CO-PBU2-M2	S-AD-PBUW-M2 S-CO-PBUW-M2
 1/4" HOSE BARB AND 5/16" HOSE BARB	S-AD-PBUO-HB4 S-CO-PBUO-HB4	S-AD-PBUA-HB4 S-CO-PBUA-HB4	S-AD-PBUV-HB4 S-AD-PBUV-HB5 S-CO-PBUV-HB4 S-CO-PBUV-HB5	S-AD-PBU2-HB4 S-CO-PBU2-HB4	S-AD-PBUW-HB4 S-AD-PBUW-HB5 S-CO-PBUW-HB4 S-CO-PBUW-HB5
 1/4" NPT MALE	S-AD-PBUO-M4 S-CO-PBUO-M4	S-AD-PBUA-M4 S-CO-PBUA-M4	S-AD-PBUV-M4 S-CO-PBUV-M4	S-AD-PBU2-M4 S-CO-PBU2-M4	S-AD-PBUW-M4 S-CO-PBUW-M4
 1/8" NPT FEMALE	S-AD-PBUO-F2 S-CO-PBUO-F2	S-AD-PBUA-F2 S-CO-PBUA-F2	S-AD-PBUV-F2 S-CO-PBUV-F2	S-AD-PBU2-F2 S-CO-PBU2-F2	S-AD-PBUW-F2 S-CO-PBUW-F2

Replace the "U" with "I" for ISO colors - Oxygen and Medical Air only

Schrader Adapters and Couplers

	OXYGEN	MEDICAL AIR	VACUUM	N ₂ O	NITROGEN
 1/8" NPT MALE	S-AD-SHUO-M2 S-CO-SHUO-M2	S-AD-SHUA-M2 S-CO-SHUA-M2	S-AD-SHUV-M2 S-CO-SHUV-M2	S-AD-SHU2-M2 S-CO-SHU2-M2	S-AD-SHUN-M2 S-CO-SHUN-M2
 1/4" HOSE BARB AND 5/16" HOSE BARB	S-AD-SHUO-HB4 S-CO-SHUO-HB4	S-AD-SHUA-HB4 S-CO-SHUA-HB4	S-AD-SHUV-HB4 S-AD-SHUV-HB5 S-CO-SHUV-HB4 S-CO-SHUV-HB5	S-AD-SHU2-HB4 S-CO-SHU2-HB4	S-AD-SHUN-HB4 S-CO-SHUN-HB4
 1/4" NPT MALE	S-AD-SHUO-M4 S-CO-SHUO-M4	S-AD-SHUA-M4 S-CO-SHUA-M4	S-AD-SHUV-M4 S-CO-SHUV-M4	S-AD-SHU2-M4 S-CO-SHU2-M4	S-AD-SHUN-M4 S-CO-SHUN-M4
 1/8" NPT FEMALE	S-AD-SHUO-F2 S-CO-SHUO-F2	S-AD-SHUA-F2 S-CO-SHUA-F2	S-AD-SHUV-F2 S-CO-SHUV-F2	S-AD-SHU2-F2 S-CO-SHU2-F2	S-AD-SHUN-F2 S-CO-SHUN-F2

Replace the "U" with "I" for ISO colors - Oxygen and Medical Air only

Oxequip and Medstar Adapters

	OXYGEN	MEDICAL AIR	VACUUM	N ₂ O
OXEQUIP 1/8" NPT MALE OXEQUIP 	S-AD-OXUO-M2	S-AD-OXUA-M2	S-AD-OXUV-M2	S-AD-OXU2-M2
1/4" HOSE BARB OXEQUIP 5/16" HOSE BARB OXEQUIP 	S-AD-OXUO-HB4	S-AD-OXUA-HB4	S-AD-OXUV-HB4 S-AD-OXUV-HB5	S-AD-OXU2-HB4
MEDSTAR 1/8" NPT MALE MEDSTAR 	S-AD-MSUO-M2	S-AD-MSUA-M2	S-AD-MSUV-M2	S-AD-MSU2-M2
1/4" HOSE BARB MEDSTAR 5/16" HOSE BARB MEDSTAR 	S-AD-MSUO-HB4	S-AD-MSUA-HB4	S-AD-MSUV-HB4 S-AD-MSUV-HB5	S-AD-MSU2-HB4

Replace the "U" with "I" for ISO colors - Oxygen and Medical Air only

DISS Fittings

		OXYGEN	MEDICAL AIR	VACUUM	N ₂ O	NITROGEN	WAGD	CO ₂	INSTRUMENT AIR
1/8" NPT MALE		S-BA-O-M2	S-BA-A-M2	S-BA-V-M2	S-BA-2-M2	S-BA-N-M2	S-BA-W-M2	S-BA-C-M2	S-BA-I-M2
		S-DA-15O-M2-DN	S-DA-15A-M2-DN	S-DA-15V-M2-DN	S-DA-152-M2-DN	S-DA-15N-M2-DN	S-DA-15W-M2-DN	S-DA-15C-M2-DN	S-DA-15I-M2-DN
		S-DA-15UO-M2-DH	S-DA-15UA-M2-DH	S-DA-15UV-M2-DH	S-DA-15U2-M2-DH	S-DA-15UN-M2-DH	S-DA-15UW-M2-DH	S-DA-15UC-M2-DH	S-DA-15UI-M2-DH
1/4" & 5/16" HOSE BARB		S-BA-O-HB4	S-BA-A-HB4	S-BA-V-HB4 S-BA-V-HB5	S-BA-2-HB4	S-BA-N-HB4	S-BA-W-HB4 S-BA-W-HB5	S-BA-C-HB4	S-BA-I-HB4
		S-DA-HB4-O-DN	S-DA-HB4-A-DN	S-DA-HB4-V-DN S-DA-HB5-V-DN	S-DA-HB4-2-DN	S-DA-HB4-N-DN	S-DA-HB4-W-DN S-DA-HB5-W-DN	S-DA-HB4-C-DN	S-DA-HB4-I-DN
		S-DA-HB4-UO-DH	S-DA-HB4-UA-DH	S-DA-HB4-UV-DH S-DA-HB5-UV-DH	S-DA-HB4-U2-DH	S-DA-HB4-UN-DH	S-DA-HB4-UW-DH S-DA-HB5-UW-DH	S-DA-HB4-UC-DH	S-DA-HB4-UI-DH
1/4" NPT MALE		S-BA-O-M4	S-BA-A-M4	S-BA-V-M4	S-BA-2-M4	S-BA-N-M4	S-BA-W-M4	S-BA-C-M4	S-BA-I-M4
		S-DA-15O-M4-DN	S-DA-15A-M4-DN	S-DA-15V-M4-DN	S-DA-152-M4-DN	S-DA-15N-M4-DN	S-DA-15W-M4-DN	S-DA-15C-M4-DN	S-DA-15I-M4-DN
		S-DA-15UO-M4-DH	S-DA-15UA-M4-DH	S-DA-15UV-M4-DH	S-DA-15U2-M4-DH	S-DA-15UN-M4-DH	S-DA-15UW-M4-DH	S-DA-15UC-M4-DH	S-DA-15UI-M4-DH
1/8" NPT FEMALE		S-BA-O-F2	S-BA-A-F2	S-BA-V-F2	S-BA-2-F2	S-BA-N-F2	S-BA-W-F2	S-BA-C-F2	S-BA-I-F2
		S-DA-15O-F2-DN	S-DA-15A-F2-DN	S-DA-15V-F2-DN	S-DA-152-F2-DN	S-DA-15N-F2-DN	S-DA-15W-F2-DN	S-DA-15C-F2-DN	S-DA-15I-F2-DN
		S-DA-15UO-F2-DH	S-DA-15UA-F2-DH	S-DA-15UV-F2-DH	S-DA-15U2-F2-DH	S-DA-15UN-F2-DH	S-DA-15UW-F2-DH	S-DA-15UC-F2-DH	S-DA-15UI-F2-DH

Replace the "U" with "I" for ISO colors - Oxygen, Medical Air and Vacuum only

International Fittings

				
JAPANESE/KOREAN	GERMAN/DIN	BRITISH PROBE/BOC	FRENCH/AFNOR	AUSTRALIAN/SIS


Fittings above are available in all gases. Contact us if interested in our MRI conditional options.

NPT Fittings

NPT Fittings		FEMALE TEE		HEX NIPPLE		PIPE TEE	
HOSE BARB FEMALE		90 DEGREE ELBOW		90 DEGREE STREET ELBOW		COUPLER	
CONNECTOR		HOSE BARB MALE		PLUG		CAP	
FEMALE CROSS		STREET TEE		45 DEGREE STREET ELBOW		PIPE NIPPLE	


Gas Regulators

Click Style

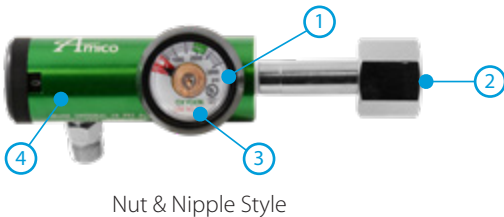

- 1 Amico Click Style is available in 50 psi Preset
- 2 Available with a CGA Nut and Nipple or CGA Yoke Style
- 3 Available in Oxygen only
- 4 Aluminum body with brass core

Compact Style

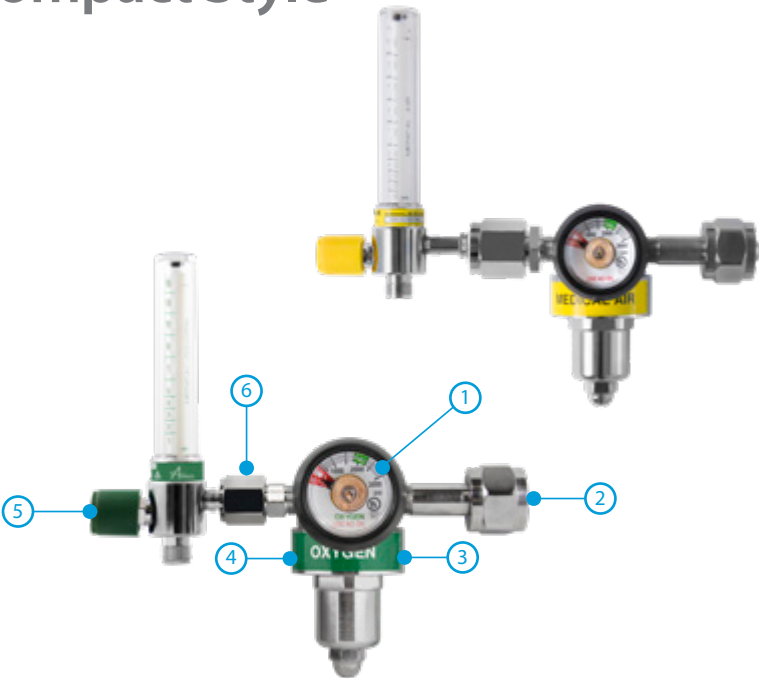

- 1 Amico Compact Regulators are available in 50 or 60 psi Preset
- 2 Available with a CGA Nut and Nipple
- 3 Available in Oxygen or Air
- 4 Available in USA or ISO colors
- 5 Available with standard Thorpe or Dial Style Flowmeter options
- 6 Machined brass

www.amico.com



Amico Patient Care Corporation | 122 East Beaver Creek Road, Richmond Hill, ON L4B 1G6, Canada
Toll Free Tel: 1.877.462.6426 | Tel: 905.764.0800 | Fax: 905.764.0862
Email: info@amico.com | www.amico.com

Represented By: